

KEF

CAPELLA II

INSTALLATION INSTRUCTIONS · INSTALLATIONSANWEISUNGEN · MODE D'EMPLOI

Loudspeaker Location

Stereo images are formed by the sound received by the listeners' directly from each loudspeaker. Confusing reflections from walls and large objects spoil the stereo effect due to the time delay involved. Therefore wherever possible loudspeakers should be placed at least 50cm from a rear wall and 1m from the nearest side wall.

The space between the two loudspeakers and the distance from the listeners' are important. If loudspeakers are placed too close together or too far apart, stereo images will not be fully developed. In average living rooms, speaker spacing between 2 and 4 metres will usually produce satisfactory results, fig. 1.

The listeners' distance from the loudspeakers should be at least equal to and preferably greater than the distance between the loudspeakers. Tests should be made with both speech and music before deciding upon final locations.

Connecting Cables

Ideally, connecting cables should be as short as possible to avoid loss of power and high frequency response.

The total resistance should not exceed approximately 0.3 ohms. The following tables show the maximum length that can be used in various gauges without audible effect on speaker performance. Colour coded cable is recommended to assist checking polarity.

Wire Type area sq. mm	spec.	max. length in metres	max. length in feet
2.50	50/0.25mm	25	160
1.50	30/0.25mm	15	100
1.25	40/0.20mm	12	65
1.00	32/0.20mm	10	40
0.75	24/0.20mm	7	25

CAUTION: Certain exotic types of cable have high capacitance which can cause instability with some amplifiers. If in doubt, select a cable from the foregoing tables.

Electrical Connections

Connection is made through the spring loaded and colour coded terminals in the rear panel. The cables should be bared for a distance of 10mm and the exposed ends inserted into the terminal block whilst depressing the coloured plastic keys. On releasing the keys, the cables will be gripped automatically.

Polarity is very important and connections to the amplifier or receiver should be made as shown, fig. 2.

N.B. Do not switch on the equipment until all connections have been completed and secured.

To check polarity, place the two loudspeakers close together facing each other about 5-7.5cm (2"-3") apart. Play a recording which has plenty of deep bass such as an organ solo, operating both speakers simultaneously with the stereo amplifier switched to 'mono'. Repeat the test after reversing the polarity of one loudspeaker. Correct polarity is indicated by firm, full bass. When incorrect, the bass will be noticeably much weaker.

Power Amplifiers

The loudspeakers will operate satisfactorily with all good power amplifiers designed for 8 ohm loading. A minimum continuous power rating of 10 watts per channel is advisable. The full potential of the loudspeakers will be achieved with amplifiers rated at 40-50 watts per channel.


Service Information

Loudspeakers are inherently reliable and rarely give trouble. It is important to remember that faults arising in any part of the reproducing system will be heard via the speakers and therefore when faults occur, careful and analytical diagnosis will be required to locate the actual source of trouble.

Loudspeakers cannot generate hiss or hum. Spurious noises of this type generally originate in the electronic sections of the equipment or even in the programme source itself. Faults in a loudspeaker will be audible on all programme sources. A fault which is evident only when playing discs but not, for example, when using the radio tuner, is not likely to originate with the loudspeakers.

Service problems should be discussed in the first place with the dealer from whom the goods were originally purchased. Generally, warranty claims are best handled by your dealer. However, in case of difficulty, contact:

Customer Service Department, KEF Electronics Limited, Tovil,
Maidstone, Kent, ME15 6QP. Telephone: 0622 672261 Telex: 96140

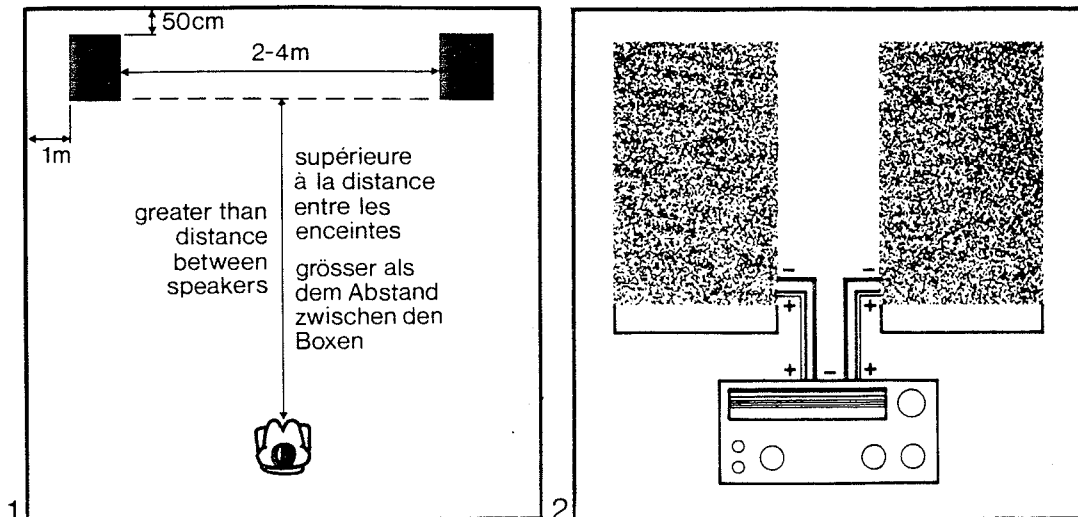

SPECIFICATION	
Frequency range	65Hz to 18kHz \pm 3dB at 2m on reference axis (-10dB at 50Hz and 22kHz)
Directional characteristics	within 2dB of response on reference axis up to 20kHz for \pm 5° vertically up to 12kHz for \pm 20° horizontally
Maximum output	104dB spl on programme peaks under typical listening conditions
Characteristic sensitivity level	87dB spl at 1m on reference axis for pink noise input of 1W
Enclosure type	Closed box
Internal volume	19 litres
Nominal impedance	8 ohms
Programme rating	50W
Maximum continuous sinusoidal input	14V rms from 80Hz to 2.5kHz reducing to 8V rms above 4kHz
Minimum amplifier requirements	10W
Weight	6kg
Dimensions	470(h) x 280(w) x 226mm(d)

KEF reserves the right to incorporate developments and amend the specifications without prior notice in line with continuous research and product improvement.

Produktverbesserung KEF behält sich das Recht vor, im kontinuierlichen Weiterentwicklung und Neuentwicklungen und Verbesserungen der Spezifikationen ohne vorherige Ankündigung einfließen zu lassen.

KEF se réserve le droit d'améliorer et de modifier les caractéristiques sans préavis en conjonction avec son programme ininterrompu de recherche et d'amélioration des produits.



KEF Electronics Limited Tovil Maidstone ME15 6QP England ☎ 0622 672261

Registered in England No 702392

Published by KEF Electronics Ltd. and printed in England.

Part No. PL432EFG01